

# LINKTOWER

مركز البراغي والعدد  
BOLTS & TOOLS CENTER **BTGO**

One of the most innovative model of the entire range, it can be run in series when linked to other lighting towers or external power sources.

- Maintenance free lighting tower
- Vertical mast
- 7m max height
- Galvanized telescopic sections
- 4 adjustable stabilizers
- Certified wind stability up to 80 Km/h
- Manual lifting system
- Rising system with manual winch
- 4 x 400W metal halide or 4 x 150W LED floodlights
- On/Off switches one for each lamp
- Lighting mast placed inside an hand trolley
- 220V - 32A - IP67 connectors (MH version)
- 220V - 16A - IP67 connectors (LED version)
- Coiled cable to supply the lamps
- Pockets and eyelets for lifting the machine with crane or forklift
- Possibility to ignite the lamps from main, generating set or another light tower
- ATEX version available (Class II - Div. 2)

## TECHNICAL DATA

### Dimensions and weight

Min Dim. (cm) 120x80x233

Max Dim. (cm) 180x140x700

Weight (Kg) 244

### Illuminated area

2100 m<sup>2</sup>

### Engines available

The Linktower has not a power generator inside, but it can be powered by the main or by the connection to another lighting tower with generator.

### Quantity per container

20 feet: 15 units

40 feet: 30 units




Linktower 4x400W MH



Linktower 4x150W LED

**LED**  
FUEL SAVING

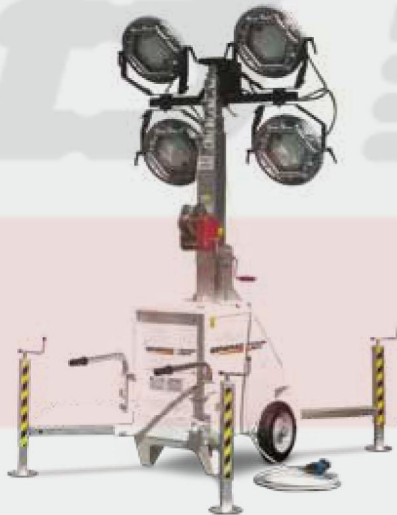

Linktower 4x150W LED - ATEX Version



Up to 4 Linktower can be connected in series to an external power source



3 Linktower 4x150W LED can be connected to the extra outlet of a VT8 (3KVA)

ILLUMINATED AREA: 2100 m<sup>2</sup>

