



P1



STAMFORD®

0 - 50 KVA

Low Voltage

DIMENSIONS

Drawings represent standard design
All dimensions in millimetres (mm)

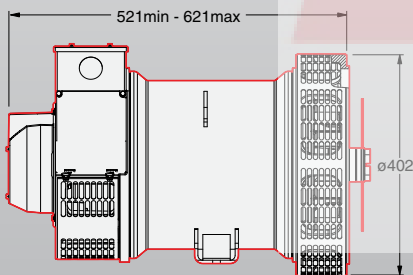

Model	P1
Maximum continuous rating at 50Hz (kVA)	45
Maximum continuous rating at 60Hz (kVA)	55

Specifications	
Voltage Range	380-600
Poles	2, 4
Technology	Wire Wound
AVR	Analogue
Voltage sensing	2-Phase
Bearing Arrangement	Single
SAE Adaptors	2, 3, 4
Terminals	12
Material Insulation Class	H
Excitation System	Self exciting
Ingress Protection	IP23
Connection with other machines	Paralleling capability

Optional Features	
Excitation System	EBS
Bearing Arrangement	Double
Output configurations	1 phase re-connectable
Temperature monitoring	Thermistors
Environmental protection	Anti-condensation Heaters

Designed For	
Marine Auxiliary	●
Oil & Gas Auxiliary	●
Telecommunications	●
Mobile Construction	●
Combined Heat & Power	●
Critical Protection & UPS	●
Continuous Power & Standby	●

Prime Movers	
Diesel Engine	●
Gas Engine	

مركز البراغي والعدد
BOLTS & TOOLS CENTER **BTGO**