

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

**TECHNICAL PROGRESS.  
SERVICE EVOLUTION.**  
Engineered since 1950.




**velyen** licensed by **ISTOBAL**

Automotive Lifting Quality



**مركز البراغي والعدد** **BTGO**  
**BOLTS & TOOLS CENTER**

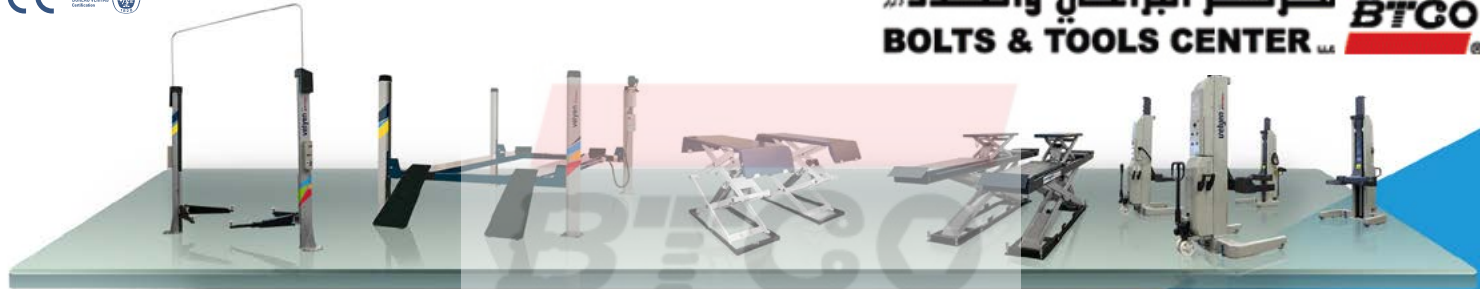

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

► **CATALOGUE ICONS**  
**LOOK UP THESE STAMPS**  
**IN THE CATALOGUE**



**SAFETY REGULATIONS**

Products homologated and certified according to the new European Directive 2006/42/CE.



**THE BEST CHOICE**




· Search this label to find our more competitive products, high-range equipment for higher performance and satisfaction throughout their life.



**BEST**

· This icon indicates the best sellers

# INDEX



▶ EXPORTS

# WE ARE A GLOBAL COMPANY



▶ EXPORTS

# 50%

A half of our production is exported

▶ COUNTRIES

# 42

Velyen is present in more than 33 countries

▶ INTERNATIONAL SUBSIDIARIES

# 3

## Velyen Automechanika 2014

# We can provide a complete service.

Stop wasting money on oil changes

Save money thanks to Velyen's management system



1,5 lifts x mechanic = 30% turnover



Increase an average of €125 per customer thanks to the active reception.



Workshops with no alignment machine lose money and customers for not giving a complete service.



Tire change.

Increase your profits offering an additional service.



Complete your workshop with equipment for vehicle inspections.

Equipment repaid over 3 months.

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

## ► HOW TO EQUIP A COMPLETE WORKSHOP AT COMPETITIVE PRICES

Control your EXPENSES, with Premium  
equipment and little investment.

**BTCO**®

You can have all the products to equip a  
professional workshop at a predetermined  
and easy to monetize cost.



Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com



Automotive Lifting Quality

► **DIFFERENT PRODUCT RANGES  
ACCORDING TO YOUR NEEDS**

**Istobal, Velyen's precedent as a specialist manufacturer  
since 1950.**

Velyen designs and manufactures lifts and lube equipment.

Also sells OEM to equip a workshop with complete equipment  
such as mot bays, tire changers, wheel balancers, aligners,  
exhaust gas extraction, etc.

Velyen, manufacturer and aftersales reference in Spain.



### **Saving, a must.**

Discover our solutions in vehicle lifts, assembled in Valencia, SPAIN, which meet the highest standards of current CE, the best price and a regular production .




► *VelyenPremium*

### **Latest design and technology**

Take advantage of more than 60 years of experience in premium components and a high level of excellence and performance..



**Manufacture Video**

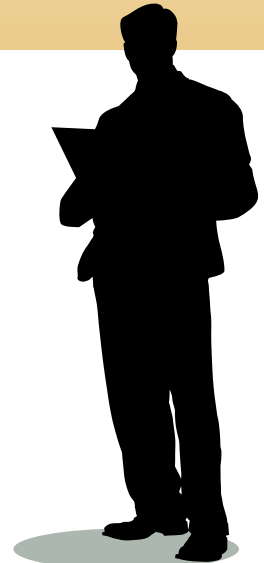



# Did you know that you could save more than you imagined thanks to a lubrication management system?

Stop wasting money with the solutions offered by VELYEN:

- Reduced purchasing costs
- Computerized control of each supply
- No more cans (+ savings + cleanliness) <sup>®</sup>
- Agility and speed

#### AMORTIZATION OVER 15 DAYS

#### EXAMPLE OF CONSUMPTION

Option	Price / Litre	15,000 L/Year	40,000 L/Year
4L Can	3,50 €	52.500 €	140.000 €
1,000L Tank	2,70 €	40.500 €	108.000 €
<b>SAVING</b>		<b>12.000 €</b>	<b>32.000 €</b>

\*Average oil price Top sellers






Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

# TURNKEY INSTALLATION

Installation example, ask for a quote

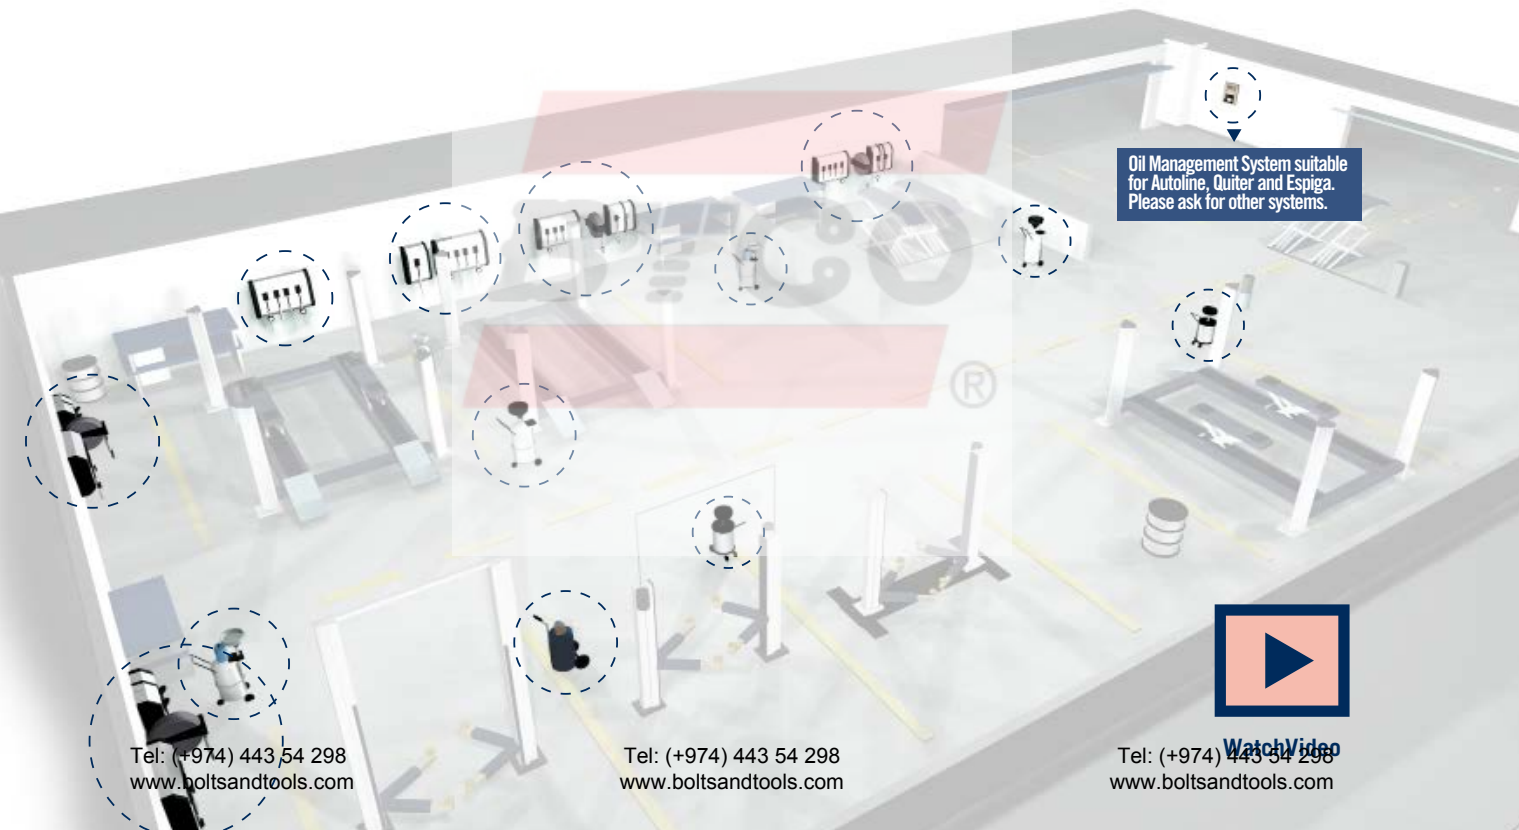

Oil Management System suitable for Autoline, Quiter and Espiga. Please ask for other systems.



Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com



Tel: (+974) 443 54 298  
www.boltsandtools.com



Tel: (+974) 443 54 298  
www.boltsandtools.com



Tel: (+974) 443 54 298  
www.boltsandtools.com



▶ 5010190

### Suction / Drainer unit 90 litres

- Mobile equipment
- Tank capacity of 90 l.
- Pressure control valve
- Extraction capacity of 60 l.
- Tank drain is operated pneumatically.

#### Advantages:

- Quick suction
- Extraction of oil by gravity or suction
- Cleaner and more efficient collection
- 5010190/K.

Tel: (+974) 443 54 298  
www.boltsandtools.com



▶ 4LM0010

### Mobile oil dispenser for 208 L tank, trolley, pump & digital gun

- Oil Pump 3:1.
- Tank Trolley.
- 4 m Hose.
- Digital Oil Gun.

Tel: (+974) 443 54 298  
www.boltsandtools.com



▶ 4LM0050

### Oil dispenser set for 1.000 L tank, open hose reel, anti-drip tray, pump & digital gun.

- Oil dispenser set with wall-bracket and 10 m hose reel for 1.000l tanks.
- Pneumatic pump 3:1 with air maintenance unit (manometer/lubricator with fitter) SAE 240 digital gun, 1m air hose and 2x2 oil hoses.
- Maximum flow 22 l/min.

Tel: (+974) 443 54 298  
www.boltsandtools.com

# Know what the professionals think



Disadvantages narrow lifts




Advantages Velyen lifts



Advantages 4EC1800

velyen

OTHER BRANDS

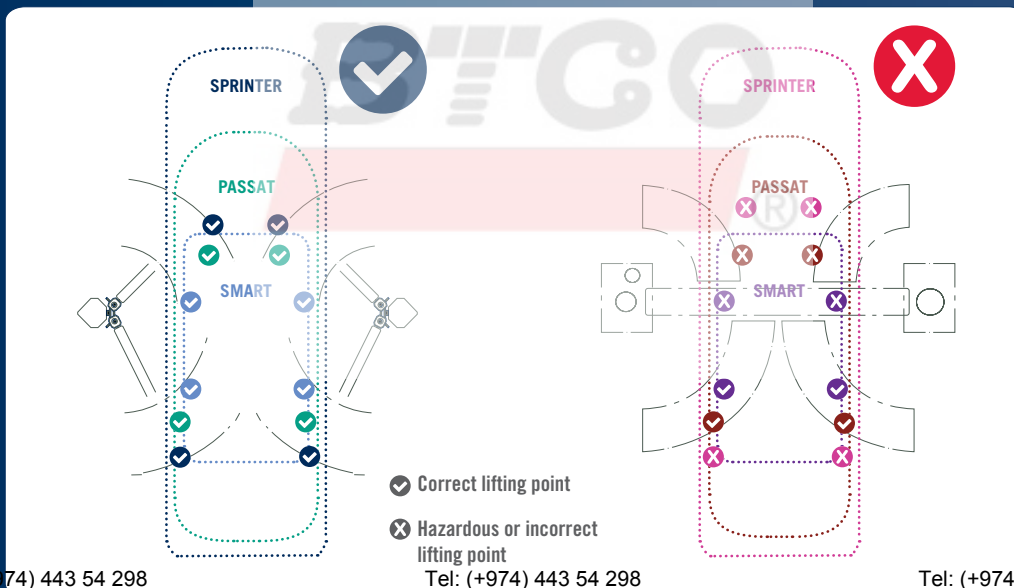

## ► 4EB1700: The new electromechanical lift with base

For decades electromechanical lifts have been the favourite lifts for those seeking a reliable and longlasting equipment in the workshop.

Originally launched in 1964 as the successor of Istobal 42700, the new 4EB1700 model is, no doubt, one of the most reliable lifts ever made.



Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

# ACCESSORIES FOR 2 POST-LIFTS 4EC1800 Y 4EB1700



▶ 4360000

Special Pad 24 cm




▶ 4301000

SafetyPad



▶ 990800 / 990700

Pad 80 mm  
Pad 130 mm



▶ 4303300

Total LED lighting




▶ 4302500 / 990200

ExpressPad Arms 4EB1700 / 4EC1800

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

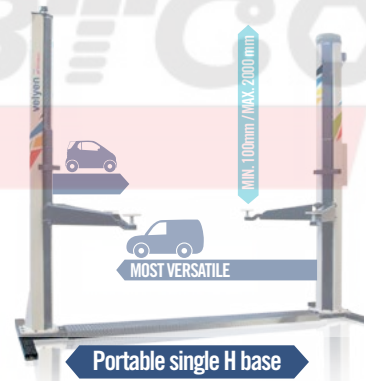

Portable single H base



EXTRA WIDE 2700 mm

ALTEURA MIN. 95mm / MAX. 2000 mm

MOST VERSATILE



Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com



► 4EC1800X



**Electromechanical 2-Post Lift Baseless 3800 Kg**  
**Electronic Synchronization: Possibly the world's most versatile lift**



► 4EB1700



**Electromechanical 2-Post Lift W/Base 3200 Kg**

**TECHNICAL DATA**

Width between columns	2795 mm
Load capacity	3800 Kg
Minimum height	95 mm
Lifting height	2000 mm
Lifting time	45"
Arm length (min-max)	Short 620-1240 mm Long 925-1540 mm
Overall width	3490 mm
Column + Overhead conduit height	4040 mm
Motor	3 Phase 230/400 V 50/60 Hz. · 2 x 2.4 KW

**TECHNICAL DATA**

Width between columns	2640 mm
Load capacity	3200 Kg
Minimum height	100 mm
Lifting height	1945/2000 mm
Lifting time	60"
Arm length (min-max)	Short 500-900 mm Long 800-1250 mm
Overall width	3335 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.4 KW

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Optional 925-1500 mm arms kit Mod.4300600

Optional Single Phase 4EB1700/2 (2,8 KW)  
Optional 800-1250 mm arms kit



Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com



► 4EC1300X



► 4EC1400



**Hydraulic 2-Post Lift Baseless 4500 Kg Semiautomatic**

**Hydraulic 2-Post Lift Baseless 5000 Kg Semiautomatic**

**TECHNICAL DATA**

Width between columns	2950 mm
Load capacity	4500 Kg
Minimum height	90 mm
Pad extensions height	100 mm
Lifting height	1900 mm
Crossbar height (ind. - out.)	3950-4085 mm
Lifting time	45"
Arm length (min-max)	740-1150 mm / 890-1390 mm
Overall width	3540 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW

**TECHNICAL DATA**

Width between columns	3090 mm
Load capacity	5000 Kg
Minimum height	90 mm
Pad extensions height	90/160 mm
Lifting height	1900 mm
Crossbar height (ind. - out.)	4920-5050 mm
Lifting time	70"
Arm length (min-max)	900-1750-2050 mm
Overall width	3840 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW

Tel: (+974) 443 54 298  
 · Optional Single Phase 4EC1300X/2  
 · Optional 890-1390 mm arms Kit Ref. 4304400 - 445€  
 · Automatic Version 4EC1300/AX - 2299 €

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com


Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com



Hydraulic 2-Post Lift With Semi-Base 4000 Kg

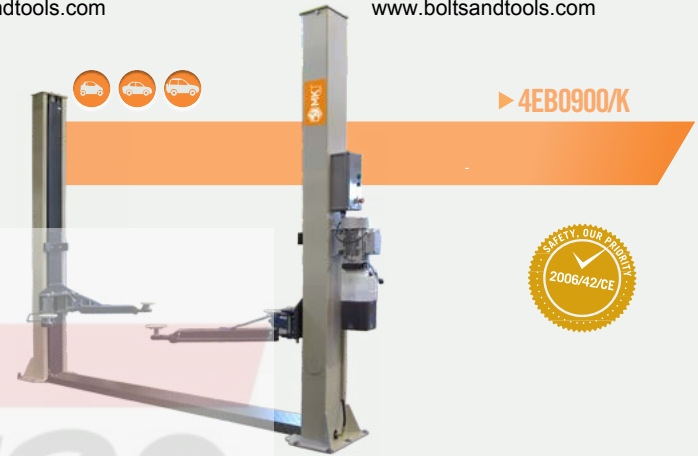

Hydraulic 2-Post Lift With Semi-Base 3500 Kg  
Manual unlocking

**TECHNICAL DATA**

Width between columns	2850 mm
Load capacity	4000 Kg
Minimum height	90 mm
Pad extensions height	90/140 mm
Lifting height	1930 mm
Lifting time	45"
Arm length (min-max)	740-1150 / 890-1390 mm
Overall width	3430 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW

**TECHNICAL DATA**

Width between columns	2850 mm
Load capacity	3500 Kg
Minimum height	90 mm
Pad extensions height	90/140 mm
Lifting height	1930 mm
Lifting time	45"
Arm length (min-max)	740-1150 / 890-1390 mm
Overall width	3430 mm
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW

Optional Single Phase 4EB1000A2  
Tel: (+974) 443 54 298  
www.boltsandtools.com

Optional Single Phase 4EB0900/2K  
Tel: (+974) 443 54 298  
www.boltsandtools.com

Optional Single Phase 4EB0900/2K  
Tel: (+974) 443 54 298  
www.boltsandtools.com



Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com



Watch Video

▶ 4ED0300

▶ 4ED0400

▶ 4ED0600



Hydraulic 4-Post Lift 100% Automatic Release No compressed Air Required

TECHNICAL DATA	4ED0300	4ED0400	☆	4ED0600	☆
Load capacity	3500 Kg	4000 Kg		5000 Kg	
Platform lengths	4370 mm	4450 mm		5230 mm	
Platform widths	450 mm	560 mm		580 mm	
Width between columns	2670 mm	2670 mm		2900 mm	
Distance between platforms	800-1235 mm	690-1015 mm		800-1210 mm	
Minimum height	190 mm	150 mm		150 mm	
Lifting height	1700 mm	1700 mm		1800 mm	
Lifting time	30"	30"		45"	
Overall length	5380 mm	5150 mm		5950 mm	
Overall width	3035 mm	3035 mm		3265 mm	
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW	3 Phase 230/400 V 50/60 Hz. 2.2 KW		3 Phase 230/400 V 50/60 Hz. 2.2 KW	

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Optional Single Phase 4ED0300/2

Optional Single Phase 4ED0400/2 / 4ED0600/2

www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com



► 4ED0400N

► 4ED1400 /4ED1600



Hydraulic 4-Post Lift 4000 Kg  
Wider For 3D Alignment

Hydraulic 4-Post Lift 4000 Kg / 5000 Kg with recesses for  
turning plates and play detector

TECHNICAL DATA

Optional Single Phase 4ED0400N/2

Load capacity	4000 Kg
Platform lengths	4450 mm
Platform widths	560 mm
Width between columns	2900 mm
Distance between platforms	690-1245 mm
Minimum height	150 mm
Lifting height	1800 mm
Lifting time	45"
Overall length	5150 mm
Overall width	3265 mm

TECHNICAL DATA

4ED1400

4ED1600

Load capacity	4000 Kg	5000 Kg
Platform lengths	4520 mm	5700 mm
Platform widths	560 mm	630 mm
Width between columns	2450 mm	2650 mm
Distance between platforms	655-850 mm	550-880 mm
Minimum height	150 mm	150 mm
Lifting height	1800 mm	1800 mm
Lifting time	45"	45"
Overall length	5320 mm	6470 mm
Overall width	2800 mm	3000 mm
Motor	Trifásico 230/400 V 2.2 KW	

Tel: (+974) 443 54 298  
www.boltsandtools.com

3 Phase 230/400 V  
50/60 Hz. 2.2 KW  
Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

MOT version (L) includes: play detector, turn plates, pedal depressor and mirrors  
Optional Single Phase 4ED1400/2 4ED1600/2


## ACCESSORIES WHEEL ALIGNMENT

Standard lift suitable also for wheel alignment thanks to optional accessories



▶ 4249000\* / 4249200\*\*

Jacking beam 2T for  
\*4ED0400 / 4ED0400N / 4ED1400  
\*\*4ED0300 / 4ED0600

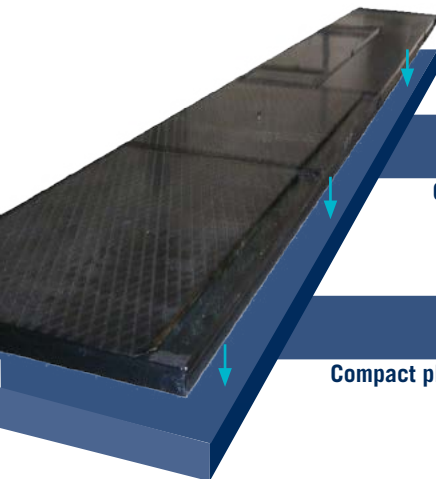

▶ 994900


Compact platform alignment  
for 4ED0400 / 4ED0400N

▶ 999992


Compact platform alignment  
for 4ED0600

▶ 992201

Play detector  
for 4ED1400 / 4ED1600




LED Lighting Equipment



▶ 1596100 x 2 unit

▶ 4661800



USABLE AREA  
374x630x16 mm

Slimline platform 16mm for  
4ED0300

▶ 4661600

USABLE AREA  
374x630x45 mm


Non-integrated platform alignment  
for 4ED0300

USABLE AREA  
560x1620x45 mm

Freewheel platform for 4ED0600

▶ 4661900

Non-integrated platform alignment  
for 4ED0600



Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com



► 4EE1150/2



**Double Scissor Lift 2800 Kg - Low Profile: 105 mm**  
Optional mobility

**TECHNICAL DATA**

Load capacity	2800 Kg.
Platform lengths	1420-2025 mm
Platform widths	460 mm
Minimum height	105 mm
Maximum lifting height	1000 mm
Distance between platforms	830 mm
Overall length	2025 mm
Overall width	1955 mm
Motor	Single Phase 230 V 50/60 Hz. 2.2 KW

Tel: (+974) 443 54 298  
www.boltsandtools.com


Tel: (+974) 443 54 298  
www.boltsandtools.com

► 4EE1300 / 4EE1400

**Performs automatic bleeding in two easy steps**



Press the UP button to raise both platforms at maximum height

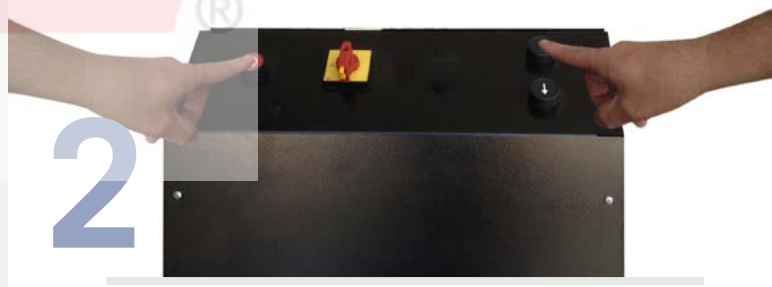

**Simultaneously press the UP button and the off-photocell button for 3 minutes to complete the purge of the hydraulic**

Tel: (+974) 443 54 298  
www.boltsandtools.com



Tel: (+974) 443 54 298  
www.boltsandtools.com



Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com



▶ 4EE1300

▶ 4EE1400



**Double Scissor Lift 3500 Kg / 3200 Kg**  
**Low Profile: 105 mm · Automatic Bleeding**



TECHNICAL DATA	4EE1300	4EE1400
Load capacity	3500 Kg.	3200 Kg.
Platform lengths	1500-2080 mm	1500-2080 mm
Platform widths	635 mm.	635 mm.
Minimum height	105 mm	105 mm
Maximum lifting height	1860 mm	1860 mm
Distance between platforms	720 mm	720 mm
Overall width	1990 mm.	1990 mm.
Motor	3 Phase 230/400 V 50/60 Hz. 2.2 KW	3 Phase 230/400 V 50/60 Hz. 2.2 KW

Tel: (+974) 443 54 298  
www.boltsandtools.com


Tel: (+974) 443 54 298  
www.boltsandtools.com

Optional Single Phase 4EE1300/2 y 4EE1400/2

Optional in-ground installation ramp supplements ref. 992500-80-50E

Tel: (+974) 443 54 298  
www.boltsandtools.com

# Did you know that accidents in workshops are above average and you can prevent them?

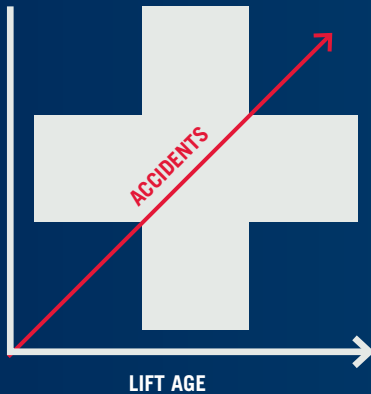

The main causes are:

- Failure to Prevent
- Lack of Training
- Lifts that do not meet current safety standards.

Solutions that Velyen offers:

- Maintenance service
- Continuing training
- Our products meet the new European Machinery Directive 2006/42/CE and Harmonized Standards EN 1493:2010





**Did you know that a workshop  
with 1.5 lifts per technician have  
a turnover of 30% higher  
than the rest?**



**+30%  
TURNOVER**



**Find out in the following pages ►**

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com


Tel: (+974) 443 54 298  
www.boltsandtools.com



▶ 4EE0700H

▶ 4EE2400

▶ 4EE2600

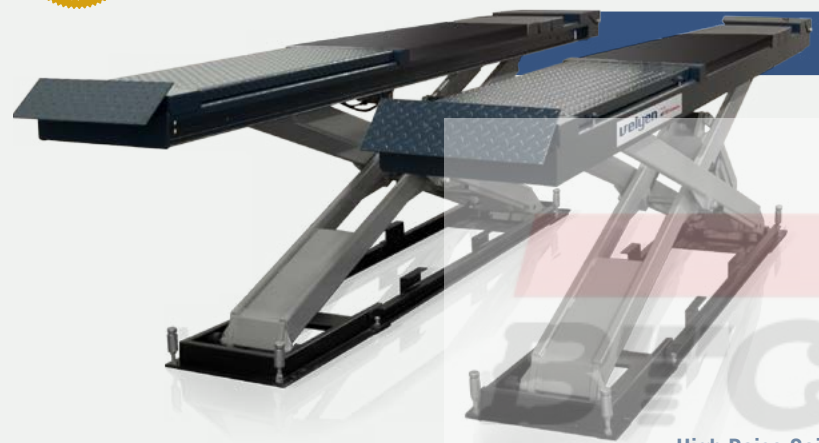

High Raise Scissor Lift 4000 Kg / 4000 Kg / 5000 Kg

TECHNICAL DATA	4EE0700H	4EE2400*	4EE2600*
Load capacity	4000 Kg	4000 Kg	5000 Kg
Platform width	665 mm	665 mm	665 mm
Platform length	5030 mm	4500 mm	5700 mm
Distance between platforms	920 mm	820 mm	820 mm
Lifting Height	2160 mm	2160 mm	2160 mm
Platform design	Flat platforms	Sliding rear platforms and recesses for turning plates	Sliding rear platforms and recesses for turning plates
Minimum height	330 mm	330 mm	330 mm
Motor	3 Phase 230-400V 50/60 Hz. 2.2 KW	3 Phase 230-400V 50/60 Hz. 2.2 KW	3 Phase 230-400V 50/60 Hz. 2.2 KW

Optional Tracking (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

\*Option (L) includes: play detector, turn mirrors



Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com



▶ 4EE0535

▶ 4EE0505H

▶ 4EE0500H

▶ 4EE0600H

### Scissor Lift For Wheel Alignment 4000 Kg / 5000 Kg Free Wheels Service

TECHNICAL DATA	4EE0535 EXTRA-SLIM	4EE0505H	4EE0500H ☆	4EE0600H
Load capacity	4000 Kg	4000 Kg	4000 Kg	5000 Kg
Platform width	660 mm	610 mm	620 mm	620 mm
Platform length	4200 mm + 1180 mm ramp	4500 mm	5030 mm	5030 mm
Distance between platforms	800 mm	820 mm	920 mm	920 mm
Lifting Height	1880 mm	2160 mm	2160 mm	2160 mm
Minimum height	200 mm	330 mm	330 mm	330 mm
Motor	3 Phase 230-400V 50/60 Hz. 2.2 KW			3 Ph. 230-400V 50/60 Hz. 5 KW

#### AUXILIARY LIFT

Load capacity	3500 Kg	3500 Kg	3500 Kg	3500 Kg
Platform length	1450 mm	1400 mm	1630 mm	1630 mm
Platform width	610 mm	570 mm	570 mm	570 mm
Lifting height	450 mm	450 mm	450 mm	450 mm

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Optional ramps ref. 993600 796€

Optional Single Phase 4EE0505H/2 4EE0500H/2




Tel: (+974) 443 54 298  
www.boltsandtools.com



Tel: (+974) 443 54 298  
www.boltsandtools.com



Tel: (+974) 443 54 298  
www.boltsandtools.com

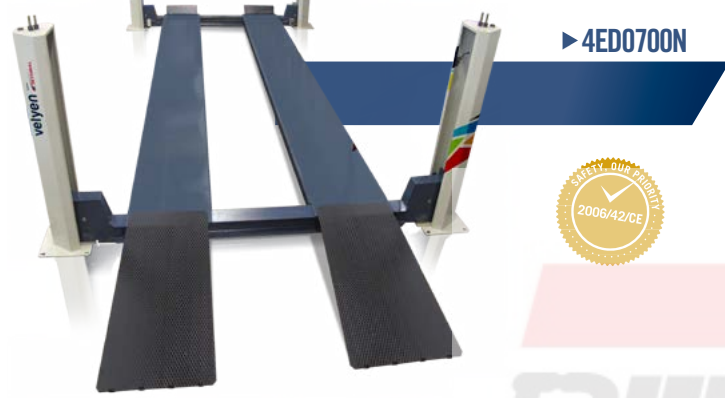

▶ 4ED0700N



▶ 4ED0800



Watch Video

Hydraulic 4-Post Lift 12000 Kg / 25000 Kg No compressed Air Required

TECHNICAL DATA	4ED0700N	4ED0800
Load capacity	12000 Kg	25000 Kg
Platform lengths	6220 mm	8000 mm
Platform widths	710 mm	810 mm
Width between columns	3265 mm	3500 mm
Distance between platforms	780-1150 mm	1000 mm
Minimum height	220 mm	240 mm
Lifting height	1660 mm	1540 mm
Lifting time	65"	90"
Overall length	7150 mm	9576 mm
Overall width	3735 mm	4269 mm
Motor	3 Phase 230/400 V 50/60 Hz. 3 KW	3 Phase 230/400 V 50/60 Hz. 3 KW

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com



▶ 5251600

Oleoneumatic 10T/Tn jacking beam for 4ED0700N

· Op. Total LED lighting ref. 4301700



▶ 5252000

Oleoneumatic 10T/Tn jacking beam for 4ED0800

· Op. Total LED lighting ref. 4301800

· Op. platform extension 1,2m for 4ED0800 ref. 4303100

Tel: (+974) 443 54 298  
www.boltsandtools.com



▶ 4EF0050

▶ 4EF0100

▶ 4EF0300



Watch Videos



Optional WIRELESS

## Mobile Column Lift 5500 Kg. (Mod. 4EF0050 / 55) - 7500 Kg. (Mod. 4EF0100 / 200) - 8500 Kg. (Mod. 4EF0300 / 400)

- Electro-hydraulic columns.
- Lifting configurations:
  - 4-column set: 1 main + 3 slaves (Mod. 4EF050 / 4EF0100 / 4EF0300)
  - 6-column set: 1 main + 5 slaves (Mod. 4EF055 / 4EF0200 / 4EF0400)
  - Available till 8-column set
- Interconnecting cables from column to column around the vehicle in a cable circuit with one open end to drive in/out.
- Adjustable wheel forks from 380 to 620 mm.
- Each slave column is equipped with interconnecting cable with plugs at both ends.
- The control system "SCS" guarantee a perfect and a smooth synchronization of the lifting columns without speed variations and a continuous monitoring of all functions.

- Optional wireless remote control.
- Individual hydraulic arm on each column permits an easy and quick position.
- Lifting columns can be operated separately or as a set.
- Safety system against obstacles.
- Mechanical upper limit stop to protect the piston travel.
- Flow valve to control the lowering speed.
- Safety valve against over-pressure..

· **Optional set 4 axle stands 8,5 Tn ref. 46200**

· **Optional wheel free cross beam ref. 462100**

Mod. 4EF055 / 4EF0200 / 4EF0400

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

# MULTIPLY THE CAPACITY OF YOUR PARKING IN AN EASY, ECONOMIC AND FITTED TO YOUR NEEDS WAY.

Solve your problems of lack of space with the new range of Velyen parking lifts.



TECHNICAL DATA	4EP 2,7 Tn	4EP 2,3 Tn	4EP 2,0 Tn Flexible
Maximum lifting height (A)	3500 mm	3500 mm	1850 mm
Overall height Elevación (F)	2100 mm	2100 mm	1600 mm
Minimum height Elevación (F)	110 mm	110 mm	110 mm
Overall width (B)	2550 mm	2555 mm	2595 mm
Platform width (G)	2100 mm	2100 mm	2100 mm
WIDE entre columnas (E)	2385 mm	2385 mm	2495 mm
Long Total Plataforma (C)	4105 mm	4105 mm	3605 mm
Capacidad Máxima	2700 Kgs.	2300 Kgs.	2000 Kgs.
Motor	230/400V. 2,2 Kw.	230/400V. 2,2 Kw.	230/400V. 1,5 Kw.
Column Sharing	YES	YES	NO
	-	-	-

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com



Watch Video

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

**AND NOW OUR NEW RANGE OF IN-  
GROUND PISTON LIFTS THANKS  
TO OUR JOINT-VENTURE WITH  
HERRMANN** 

# velyen



Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com



▶ 4EM0110



**Pneumatic Motorbike Lift 450 Kg**

- Manual control of lowering speed.
- High quality cylinder operated with compressed air.
- Lifting time 3-8 sec.
- Lowering safety control system.
- Locking system at different heights.
- Safety chain for front wheel included.

Tel: (+974) 443 54 298  
www.boltsandtools.com



Tel: (+974) 443 54 298  
www.boltsandtools.com



▶ 4EM0300/2



**Hydraulic Motorbike Lift 500 Kg**

- Mobile equipment that can be easily displaced thanks to its support wheels.
- Manual lowering speed control.
- High quality hydraulic cylinder.
- Lifting speed 20 seconds.
- Lowering safety control system.
- Anchoring System at different heights included.
- Safety chain for the front wheel of the bike



Tel: (+974) 443 54 298  
www.boltsandtools.com

Watch Video



Tel: (+974) 443 54 298  
www.boltsandtools.com



▶ 4EM0400/2 MOT



**Motorbike and Quad Lift MOT 600 Kg**

- Solid and resistant platform up to 600 Kg.
- Sliding ramps for in-ground and surface installation.
- Lowering security system.
- Locking system at different heights.
- Corrugated anti-slippering ramps.
- Drilled platform for vehicle.
- Optional wheel locking.
- Highly stable platform.
- ON / OFF push botton with emergency stop.
- Lowering acustic warning

Tel: (+974) 443 54 298  
www.boltsandtools.com

# MOT EQUIPMENT



- Velyen offers you the most complete range of MOT equipment manufactured in Spain according to the highest UK Standards




**DOWNLOAD  
MOT BROCHURE**



# MOT EQUIPMENT



► **Results of investment on MOT.**  
Data from official workshops

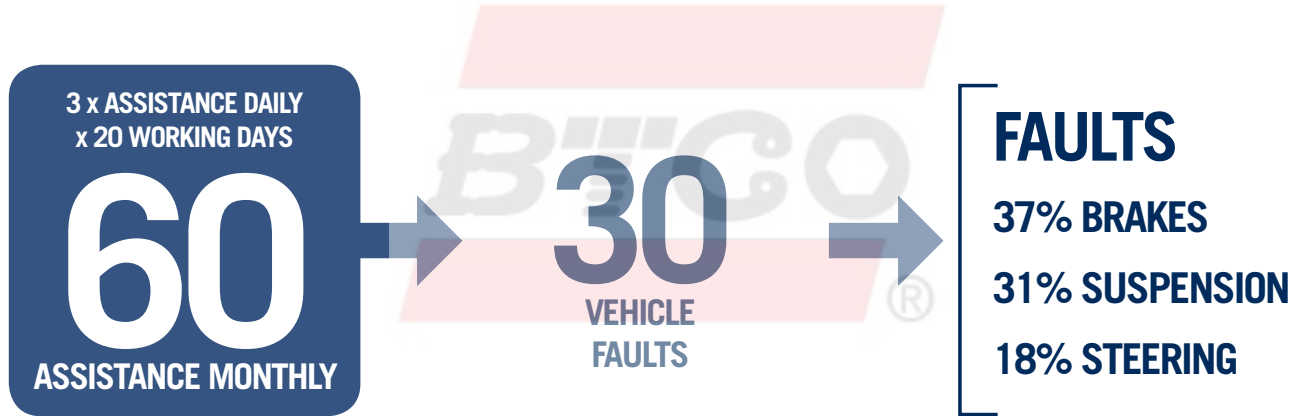



# ▶ INVEST IN MOT BUSINESS



▶ 4EE2500



## Scissor Lift 4500 Kg MOT Special with 1 front and 2 rear hydraulic detectors

### TECHNICAL DATA <sup>®</sup>

Load capacity	4000 Kg
Platform width	620 mm
Platform length	5030 mm
Distance between platforms	920 mm
Lifting Height	2160 mm
Minimum height	330 mm
Motor	3 Phase 230-400V 50/60 Hz. 2.2 KW

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com



# BTCO

## 3D Wheel Aligner

### Aligner CCD Radio 2.4 GHz

- Wireless radio Wheel Aligner for car and light commercial vehicles with computer and LCD 19".
- Movable use, independent of place.
- Rapidity and Flexibility Software
- Specially useful for multi-axle vehicles
- Quick measurement: Total Toe, Front camber and king pin, Caster, Front and Rear king pin, set back
- Compensation thrust (without using auxiliary lift)
- Tire size 12 " - 24"
- Vehicle width from 1.2 to 2.4 m
- Vehicle length from 1.8 to 4 m

- Height adjustment camera: equipped with a height controller that coordinates the camera and adjusts the height of the camera to the optimum working position.4RC0400/L
- Automatic lifting with targets on wheels
- Vehicle data base with more than 20.000 vehicle data including American & European data.
- Multilanguage
- Two high resolution cameras at the beam ends.
- Level compensation system of high precision to correct any error due to level differences during elevation.
- Suitable for high definition graphics
- User friendly and quick alignment in 4 steps (Pre-Alignment Inspection, Push-Pull Run-Out, Turn Left-Right and Alignment Results)
- High speed data processing with low power consumption.
- No electronics on wheels
- Multiple Print Formats: Graphical Printout, Text Printout and Pre-Alignment Inspection Report.
- On-line correction mode helps operator to correct the alignment with easy 3 color bar code identification and 3D animated illustrations.
- Ability to customize logos and screens to increase the productivity.
- Rugged use targets (no glass, no electronics and corrosion resistant).
- Note: in case of breakage only replaces the last .
- Height Supplement ref. 4304700/800/900: +136€



Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com

Tel: (+974) 443 54 298  
www.boltsandtools.com



▶ 4RA0505



Watch Video

### Professional 3-Phase Automatic Tyre Changer Til 23"

- Equipment designed to work at the maximum output.
- Certified products according to European Directive 2006/42/CE.
- High quality components to guarantee a long-life and minimize maintenance and repair works
- Automatic Tyre Changer for passenger vehicle
- High resistance vertical column with AUTOMATIC back-ward movement
- Two speeds turntable and pneumatic tyre placing.
- **Professional automatic tyre changer with tubeless ref. 4RA0505I: 1670€**
- **Optional helparm for run-flat ref. 4800165/K: 807€**
- **Optional motorbikes ref. 4800900: 217€**
- 3-Phas 230V tyre changer available (4RA0505/2): 1.485€
- 1-PHASE 230V tyre changer available (4RA0505/2): 1.636€



▶ 4RB0051/2



### Wheel Balancer Till 24"

- Manually Adding the geometric data of the wheel.
- High quality design.
- Certified products according to European Directive 2006/42/CE.
- High quality components to guarantee a long-life and minimize maintenance and repair works
- Activation and automatic brake release (not positioning)
- Automatic search of the right balanced position.
- ALU-P alloy wheels Programs
- Wheel Weight Capacity up to 65 kg.
- Tree diameter Ø36mm
- **Optional for wheels without central hole ref. 4803301: 308€**
- **Optional cone Ø36 95-175 mm ref. 4803137: 77€**
- **Optional motorbikes adapter ref. 4803802: 303€**



▶ 4RB0851A/2



### Professional Automatic Wheel Balancer 28"

- Optimization program (look for the best coupling between rim and tire imbalance term values with noise reduction gear) .
- Program weight hidden (ALU-P - for subdividing the adhesive weight for the outside into two equivalent weights positioned behind the spokes of the rim).
- Activation and automatic brake release (not positioning)
- Wheel Weight Capacity up to 65 kg. Basic SCS included. Kit 3 cones included Ø40-158mm
- Automatic adding the geometric data of the wheel
- Tree diameter Ø40mm. Protection including wheel.
- Software generation. ALU-P alloy wheels Programs.
- **Opt. for wheels without central hole ref. 4803303: 308€**
- **Optional cone Ø40 118-173 mm ref. 4803601: 217€**
- **Optional motorbikes adapter ref. 4803803: 478€**