




4TP21NSx1
4TP21NXx1
4TV21NSx1
4TV21NXx1

10,000 lbs. Capacity



- Exclusive 2n1® lifting arms for asymmetric or symmetric vehicle positioning. Improves versatility and ease of use.
- 1½" stack pad lift system for faster set up. "V" and "P" models also 3" & 6" height adapters for SUV's and trucks.
- Proven twin hydraulic cylinders and cable equalization.
- More steel for more strength. Reinforced columns for better stability.
- Two installation heights of 138½" or 148½" (extended height "P" model is 172")
- Door bumper guards and outer arm adapter on "P" series protects the vehicle.
- Steel 3½" diameter pulleys for low maintenance and longer life.
- North American made power pack for dependability. Can be mounted on driver or passenger side for specific applications

Available Accessories




Outer Arm Adapter
4T2PHA



Door Bumper Guard
4T2PBG






1½" - 3" - 6" Height Adapters
4T2PA136

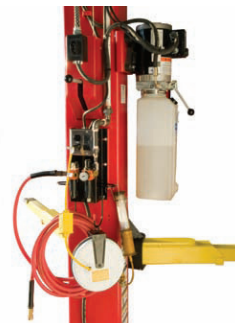

Air - Electric Station
4T2AES

TWO POST FEATURES	4TP21NSx1 4TV21NSx1	4TP21NXx1 4TV21NXx1
ALI/ETL Certified	yes	
2n1 (asymmetric/symmetric) Lifting	yes	
Clear Floor Design	yes	
Cable Equalization	yes	
Standard Height Model	yes	
Extended Height Model (optional)	no	yes - 172" height
Standard Width Model	yes	wider
Stack Pad Adapters (truck adapters)	1 1/2"	1 1/2" & 3" & 6"
Door Bumper Guards	yes	
Structural Warranty	1 year	2 years
Hydraulic Parts Warranty	1 year	2 years
Others Parts Warranty	1 year	2 years
Accessories Warranty	90 days	90 days
Labor Warranty	1 year	
Optional Blue Paint	yes	
Optional 3 Phase Power	yes	
SPECIFICATIONS	TLS210SRx1 TLS210MRx1	TLS210MXx1 TLS210SXx1
Capacity	10,000 lbs	
Overall Height	138 1/2" or 148"	138 1/2" - 148 1/2" or 172"
Under Bar Clearance	131" or 141"	
Overall Width	135 1/2"	145 1/2"
Width Between Columns	113"	123"
Drive Thru Width	92"	102"
Height to Lowered Lift Pad	4 1/2"	
Raised Height with Standard Pad	75"	
Raise Height with Adapters	84"	
Lifting Time	55 seconds	
Front Arm Reach	28 1/2" to 42"	
Rear Arm Reach	37" to 55"	
Standard Power Requirements	230V-60Hz-1ph-20A	
Shipping Weight	1,980 lbs.	2,160 lbs

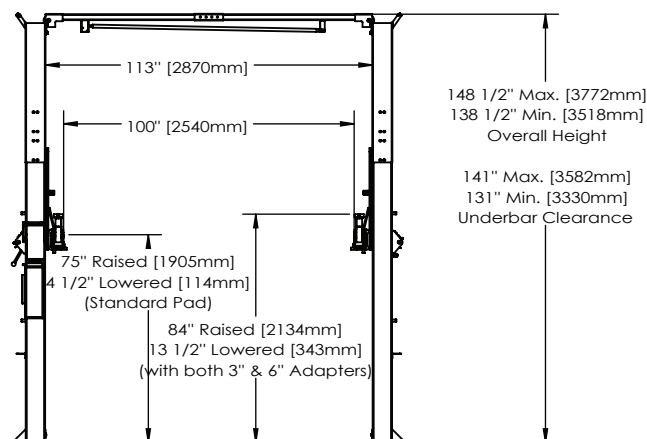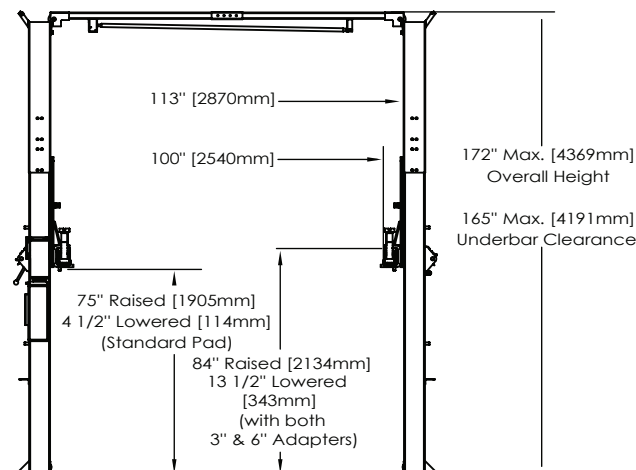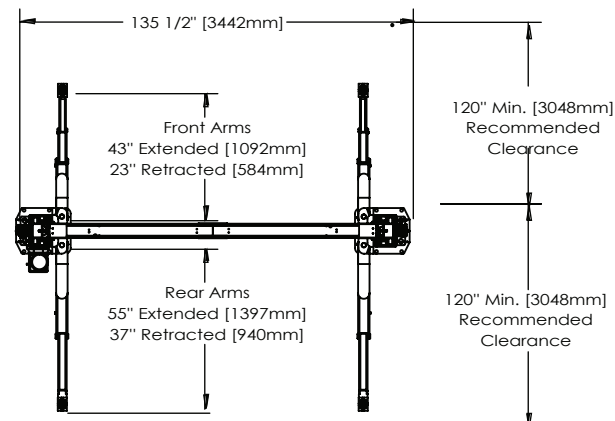

Concrete: Thickness 4" [100mm]
Strength: 4000psi [28MPa]
Aged: 30 days

Electrical: 230V/1Ph/60Hz -20A. (Standard)
230V/3Ph/60Hz- 15A. (Optional)